

COMPLIANCE SUMMARY REPORT / PRODUCT SPECIFICATIONS

CARLRAY TERMITE SHIELDING
COMPLY TO AUSTRALIAN STANDARD FOR TERMITE MANAGEMENT AS 3660. 1:2014


Manufactured By

Carlray Pty Ltd
 448 The Boulevard
 Kirrawee N.S.W. 2232


Application

Carlray Termite Shielding forms a physical barrier to termites & white ants. Installed on all subfloor structures on which termites might gain concealed access, such as piers, stumps & walls below the underside of floor framing member or suspended concrete slab. Carlray has a wide range of sizes to suit most applications. We also manufacture special sizes on request.


Full Termite Cap




Half Termite Cap




Full Cont Termite Shielding



Half Cont Termite Shielding






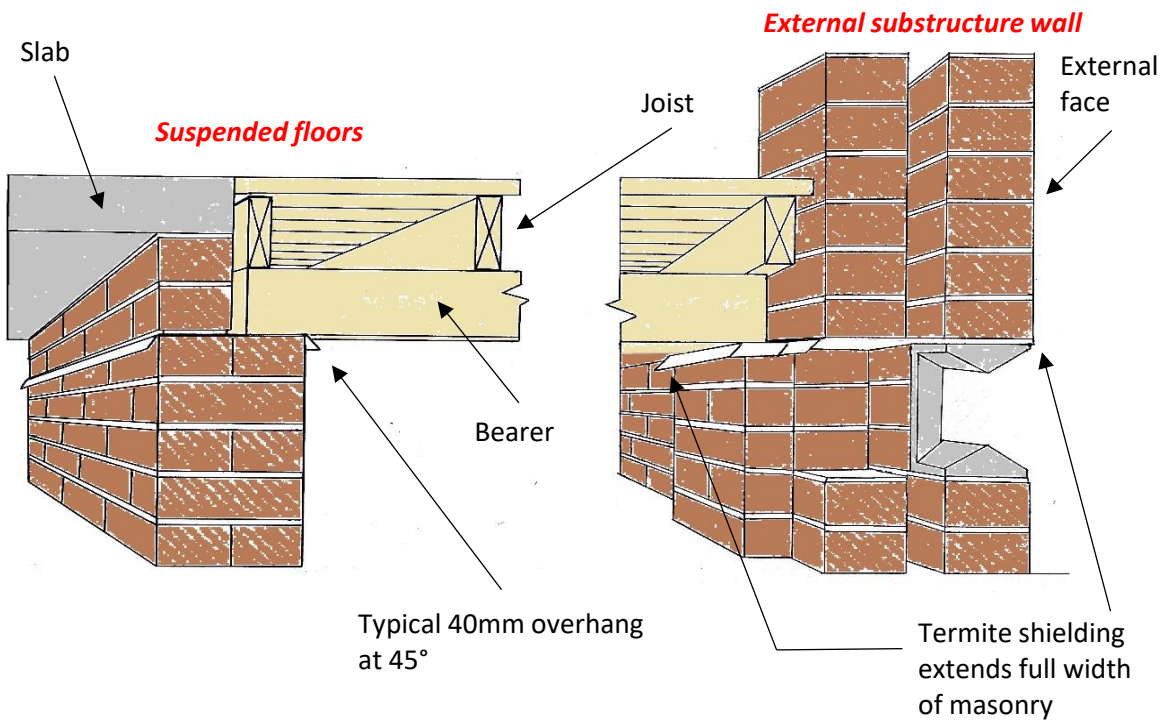


SPECIFICATIONS		
Galvanized Coating	Material Thickness	Sizes
Z275	0.5mm +	1.8m / 2.4m / 3.6m
Note: Galvanized in compliance to AS/NZS 4680		



Comply with the Australian Standards for Termite Management AS 3660.1:2014.

COMPLIES TO AUSTRALIAN STANDARD FOR TERMITE MANAGEMENT AS 3660.1:2014				
TERMITE SHIELDING	SIZE FINISH	Pack	CODE	UNIT
CONTINUOUS	GALV Z275			

	1800x170mm 115x55	10	85038	Lgth
	2400x170mm 115x55	10	85041	Lgth
	3600x170mm 115x55	10	85054	Lgth
	1800x225mm 55x115x55	10	85067	Lgth
	2400x225mm 55x115x55	10	85070	Lgth
	3600x225mm 55x115x55	5	85083	Lgth
	1800x285mm 230x55	5	85096	Lgth
	2400x285mm 230x55	5	85106	Lgth
	1800x340mm 55x230x55	5	85122	Lgth
	2400x340mm 55x230x55	5	85135	Lgth
	1800x390mm 55x280x55	5	85229	Lgth
	2400x390mm 55x280x55	5	85245	Lgth
	1800x335mm 280x55	5	85287	Lgth
	2400x335mm 280x55	5	85290	Lgth

TERMITE CAPS	GALV Z275			
--------------	-----------	--	--	--

	230 x 230mm full	10	85180	Each
	230 x 115mm half	10	85193	Each
	350 x 350mm full	10	85205	Each